

ArcPod 27Q

27x10 W RGBW / FC outdoor IP66 wash light

ORDER CODE: **ARCPD27Q**



ArcPod 27Q is a compact high-power exterior wash light featuring an outstanding brightness of 11'500 lumens. It is equipped with 27x10 W RGBW / FC LEDs, delivering a limitless reproduction of colours and whites. **ArcPod 27Q** is designed slim and fanless, and it's completed by a wide selection of available optics, making the **ArcPod 27Q** an incredibly flexible and versatile device for any outdoor install.

MAIN FEATURES

- 27x10 W RGBW / FC LEDs delivering 11'500 lumens
- LED emitters controllable in 3 linear sections
- Compact form factor and fanless

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 27x10 W RGBW / FC LEDs
- CRI:
- Luminous flux: @full 11'480 lm
- Lux: 15° @full 11'276 lx @3 m

OPTICS

- Beam angle: 15°
- Field angle: 28°
- Additional optics: 10° - 25° - 45° (optional)
- Other: barn doors not included

COLOUR SYSTEM

- Colour mixing: RGBW / FC
- CTC: CTC control through dedicated DMX channel
- Colour wheel: virtual colour wheel with presets

DYNAMIC EFFECTS

- FX generator: up to 3 linear controllable sections

BODY

- Tilt angle: 0 ~ 130° with manual regulation

CONTROL

- Protocols: DMX512, RDM
- DMX channels: 5 / 7 / 10 / 13 / 17 channel
- Pixel control: up to 3 linear controllable sections

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Selectable PWM: 600 ~ 25.000 Hz

ELECTRICAL

- Power consumption (at 230 V): 268 W
- Output (at 230 V): 9 units on a single power line

PHYSICAL

- Adaptors: XLR and Schuko 16A adaptors included
- Signal connection: moulded IP signal IN/OUT connectors
- Power connection: moulded IP signal IN/OUT connectors
- IP rating: 66 for outdoor installations
- Dimensions (WxHxD): 455x258x83 mm
- Weight: 9 kg


ACCESSORIES & RELATED PRODUCTS

- S27QLENS10/25/45: 10°/25°/45° lens for SOLAR27Q/48Q, ARCPD15Q27Q/48Q/96Q
- S27QBD: Black barn door 4 directional flaps to adjust the light beam, SOLAR27Q, ARCPD27Q
- DATAMASTER: RDM/DMX tool, cable tester, 5p XLR connectors, pouch, charging cable, XLR adapters

- AWEXAC1L03/05/10/20: IP67 power extension cable for ARCHWORK projectors, L.03/05/10/20 m
- AWEXDC1L03/05/10/20: IP67 power extension cable for ARCHWORK projectors, L.05/05/10/20 m
- UPBOX1U: Firmware uploader kit, USB IN, 3-pin XLR DMX OUT, USB OUT


COLOUR PRESET FULL ON

Beam angle 15°



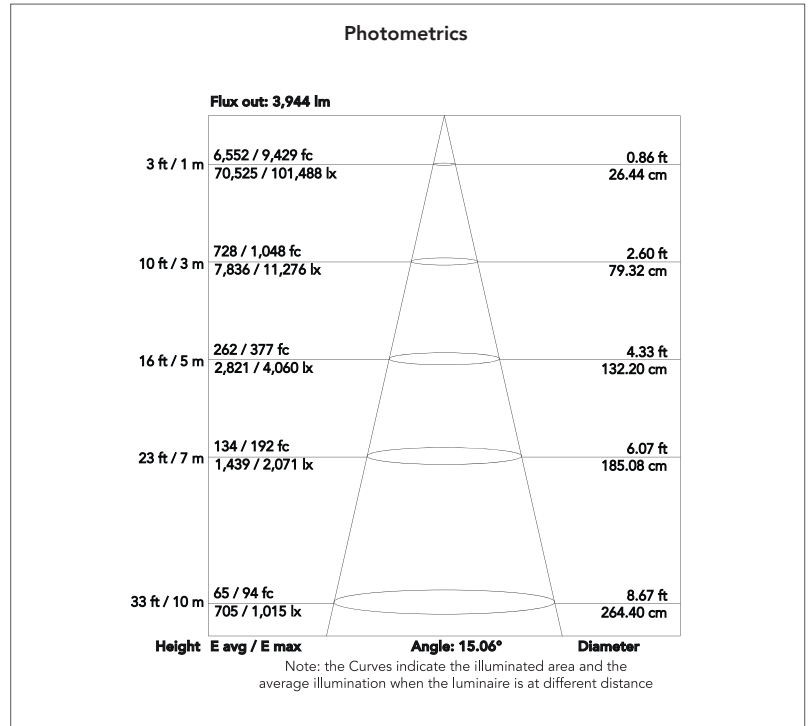


COLOUR PRESET FULL ON

Beam angle 45°

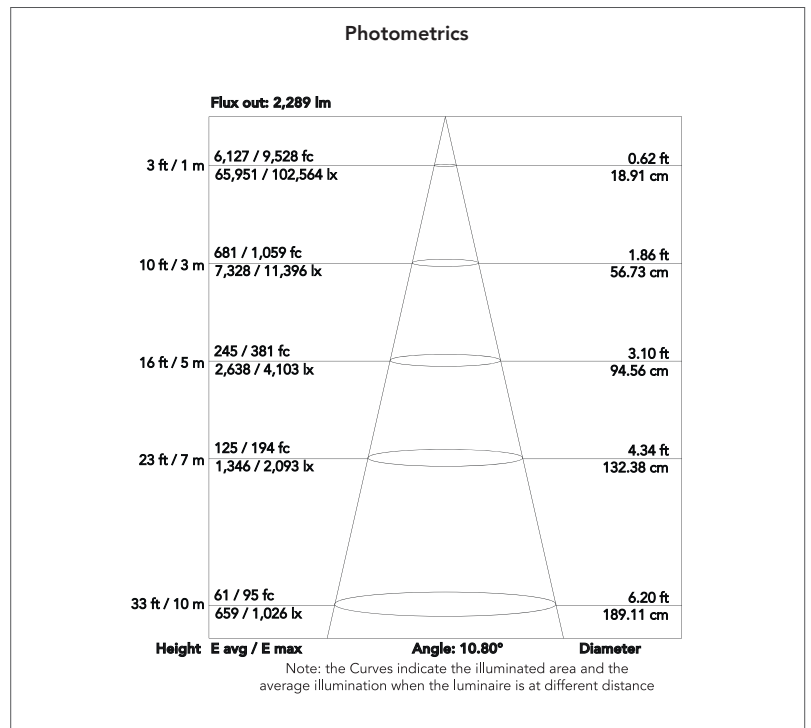

TECHICAL DRAWINGS

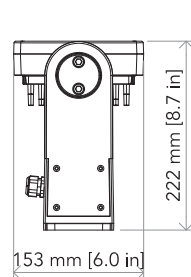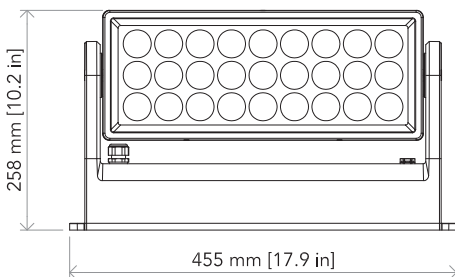

For more product info and downloads visit our website

