


Smart Torch - RGBW

Fireless, battery operated candle light



Photometrics

Flux out: 2.38 lm

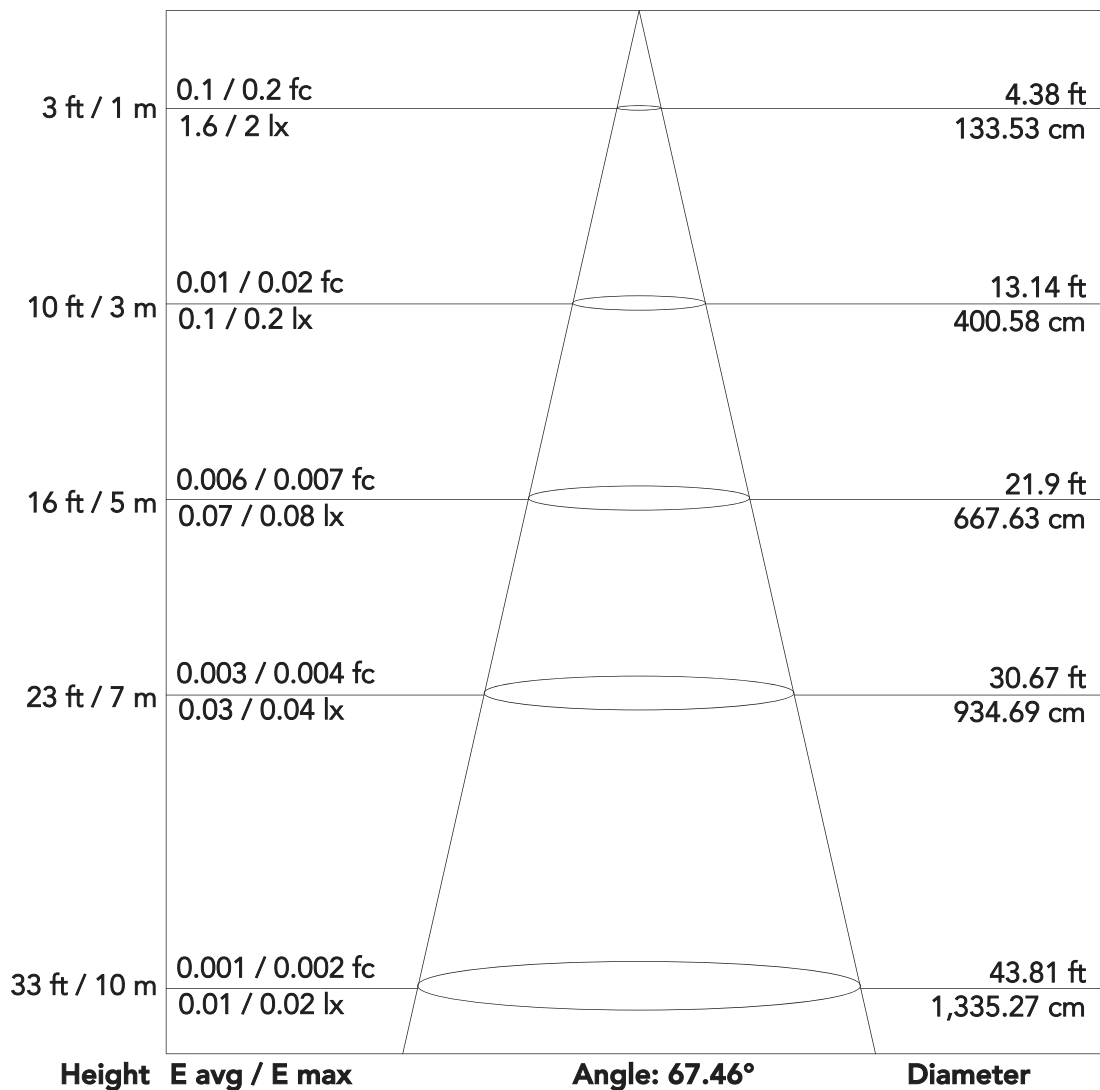

Note: the Curves indicate the illuminated area and the average illumination when the luminaire is at different distance


Smart Torch - RED

Fireless, battery operated candle light



Photometrics

Flux out: 0.29 lm

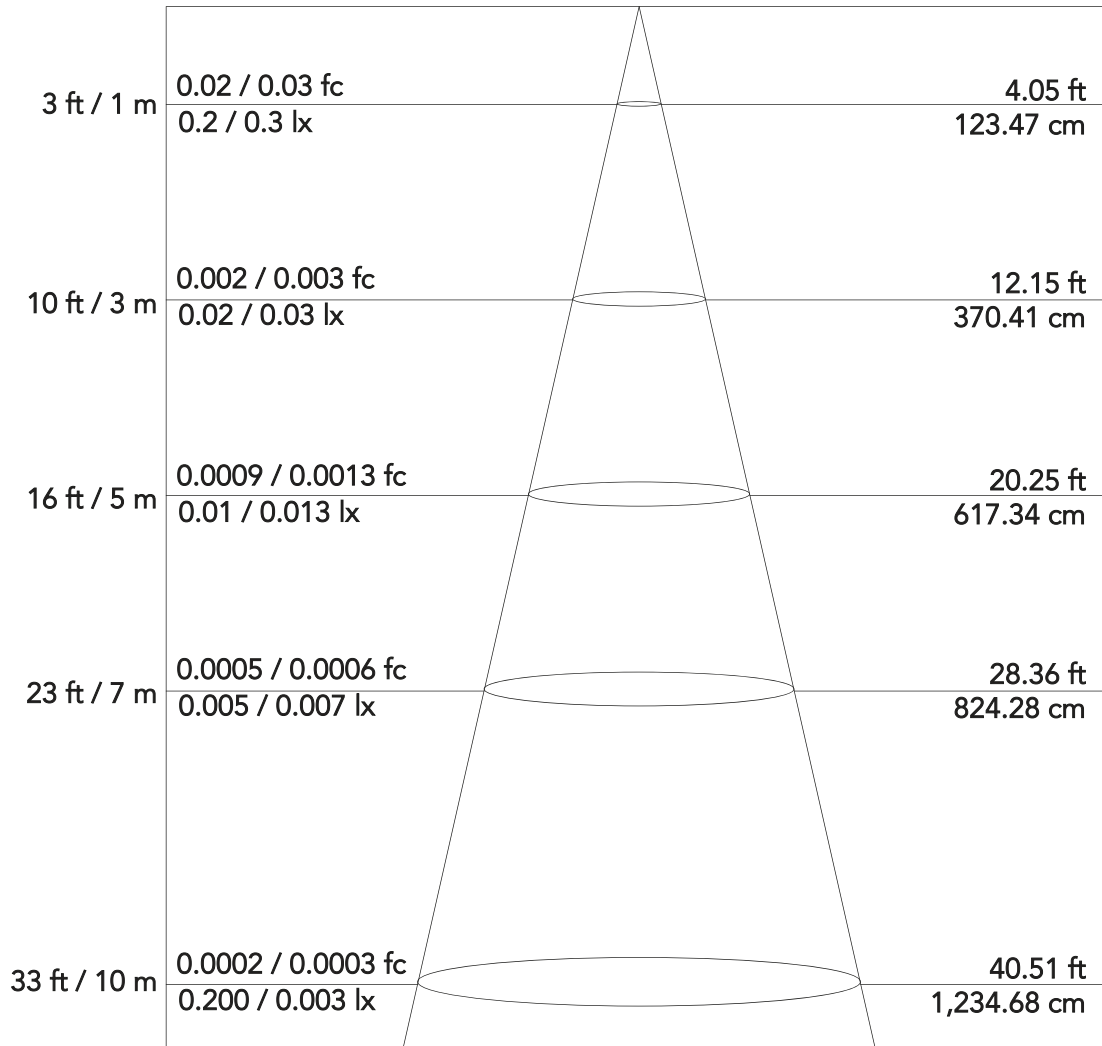

Height E avg / E max

Angle: 63.38°

Diameter

Note: the Curves indicate the illuminated area and the average illumination when the luminaire is at different distance


Smart Torch - GREEN

Fireless, battery operated candle light



Photometrics

Flux out: 1.11 lm

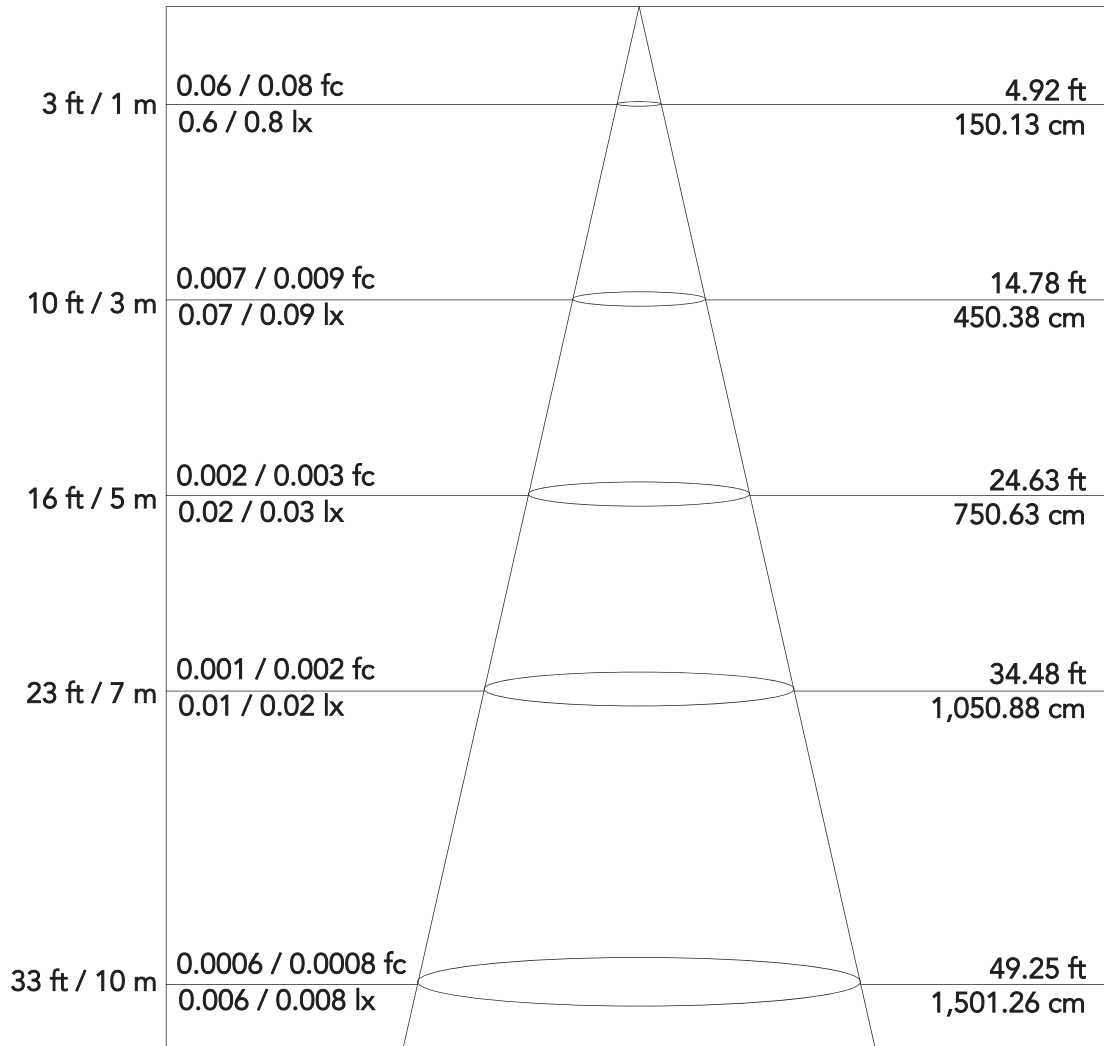

Height E avg / E max

Angle: 73.79°

Diameter

Note: the Curves indicate the illuminated area and the average illumination when the luminaire is at different distance


Smart Torch - BLUE

Fireless, battery operated candle light



Photometrics

Flux out: 0.18 lm

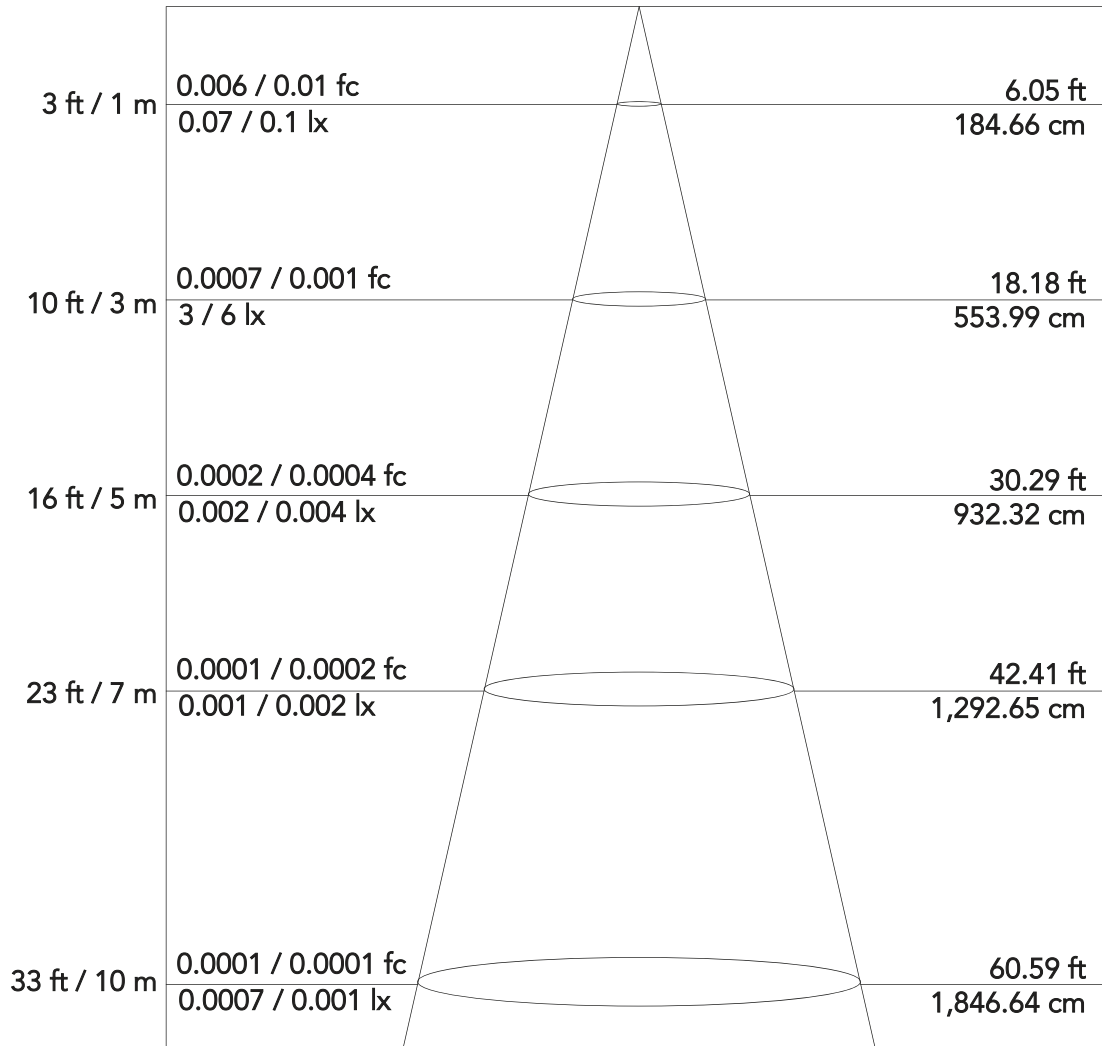

Note: the Curves indicate the illuminated area and the average illumination when the luminaire is at different distance


Smart Torch - WHITE

Fireless, battery operated candle light



Photometrics

Flux out: 1.06 lm

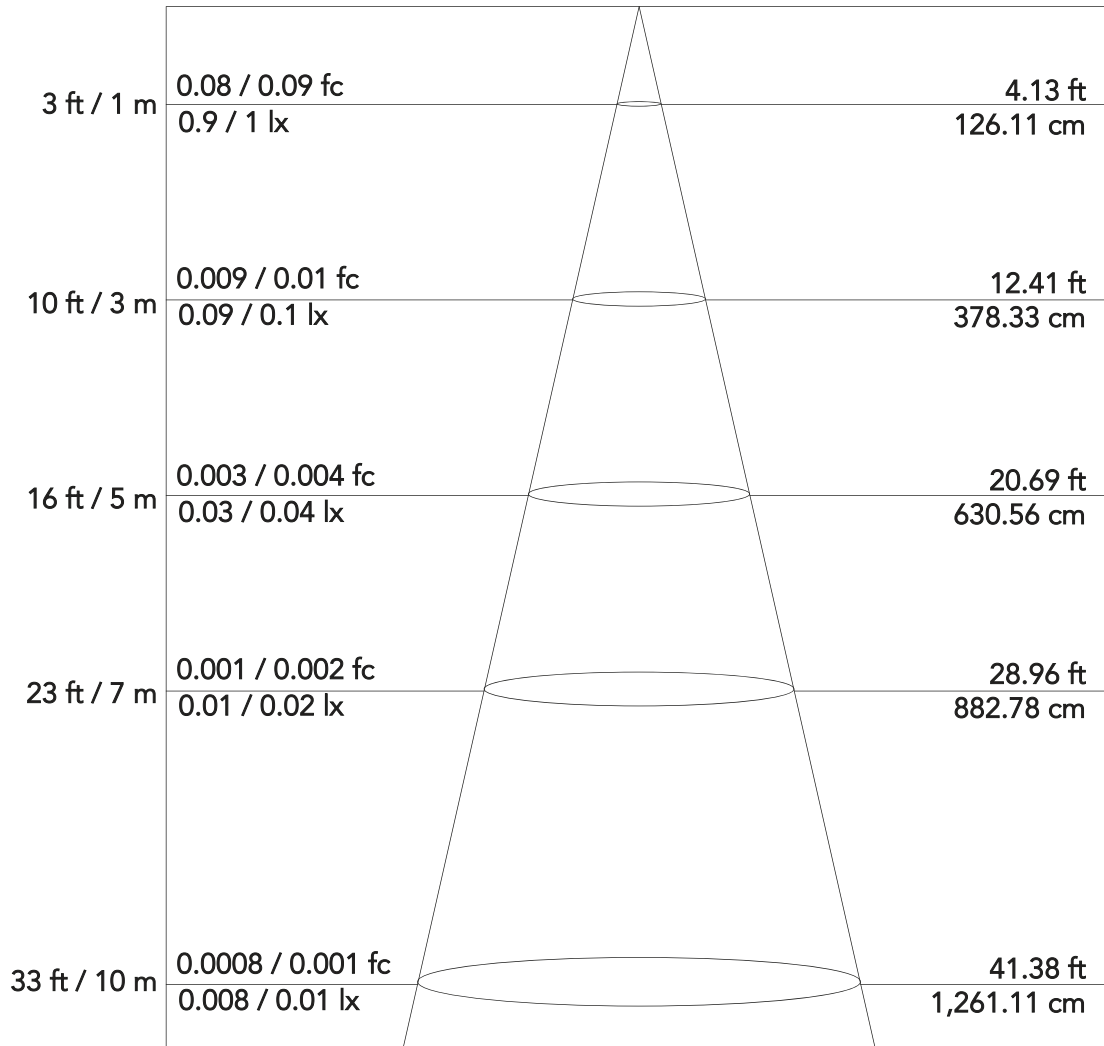

Note: the Curves indicate the illuminated area and the average illumination when the luminaire is at different distance