

SunBar 2500MAX

160K lumen white LED graphic strobe batten with interchangeable lenses

ORDER CODE: **SUNBAR2500MAX**



SunBar 2500MAX is an exceptionally powerful LED graphic strobe batten also featuring as a static blinder and flood. **SunBar 2500Max** offers flexible control of the beam coverage through an interchangeable lens system, passing from 120° wide to 40° beam increasing the light intensity up to x4.

Available in white or full colour versions and designed to deliver simply staggering light levels, this versatile fixture can provide an unbelievable punch over a huge area.

MAIN FEATURES

- Staggering 160'000 lumen output (strobe) with 120° beam angle
- Art-Net, Kling-Net and DMX control
- Graphic effects from 64 individually controllable groups of 7.000 K White LEDs

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 1.024x1,3 W high-power white LED
- CCT: CW: 7.000 K
- CRI: 87
- Luminous flux: strobe without lens (peak) 160'000 lm - static ON without lens 45'000 - strobe with lens (peak) 112'000 - static ON with lens 40'000 lm
- Lux: (120°) 2'093 lx - (40°) 5'640 lx @3 m
- Source life expectancy: > 30.000 h

OPTICS

- Beam angle: without lens 120°, with lens 40°
- Field angle: without lens 150°, with lens 80°
- Additional optics: mountable 40° lens reflector plate (included)

DYNAMIC EFFECTS

- Rotating gobos: dynamic patterns with speed and rotation control
- Pixel patterns: pre-programmed dynamic and static patterns
- FX generator: adjustable foreground/background index, speed, direction
- Static colour mode: selection of static colour
- Manual colour mode: manual adjustment of colour
- Auto mode: built-in programs with execution speed adjustment
- Special features: multi-layer pixel FX control

BODY

- Hardware on-board: OMEGA sockets for quick rigging (clamp not included)
- Body: sturdy die-cast aluminium body conceived for long-time durability
- Body colour: black

CONTROL

- Protocols: DMX512, RDM, Art-Net, Kling-Net
- DMX channels: from 1 to 71channel
- Pixel control: 1 / 2 / 4 / 8 / 16 / 64 individually select and control sections
- RDM: RDM ready for fixture remote monitor and settings
- Display: black TFT touch display
- Firmware upgrade: yes, via USB - DMX interface (UPBOX1) not included

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 4 different dimming curves available
- Strobe / shutter: 1 - 30 Hz, electronic
- Operating temperature: -10° ~ +45°
- Selectable PWM: 600 ~ 25.000 Hz

ELECTRICAL

- Power supply: 100-240 V – 50/60 Hz
- Power consumption (at 230 V): full static: 596 W - strobing: 1'060 W
- Power consumption (at 120 V): full static: 621 W - strobing: 1'166 W
- Output (at 230 V): 3 units on a single power line

PHYSICAL

- Cooling: forced air with low noise fan
- Suspension and fixing: hanging bracket for floor positioning with "Quick-Lock" system
- Signal connection: Amphenol XLR 5p IN/OUT connectors
- Data connection: Art-Net RJ45 IN/OUT
- Power connection: Seetronic powerCON waterproof IN/OUT connectors
- IP rating: 20
- Dimensions (WxHxD): 1.000x75x231 mm
- Weight: 9,5 kg


ACCESSORIES & RELATED PRODUCTS

- OS26: Quick-Lock omega bracket
- UPBOX1U: Firmware uploader kit, USB IN, 3-pin XLR DMX OUT, USB OUT

- FCLSUNBAR: Flight case for 5pcs of SUNBAR


COLOUR PRESET FULL ON

Beam angle 40° (with reflector)



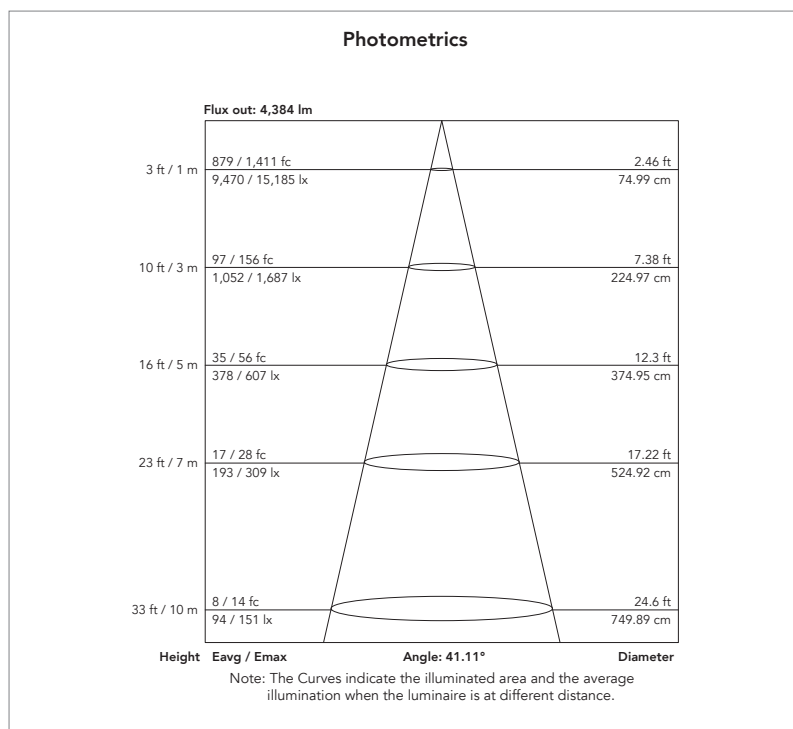


COLOUR PRESET FULL ON

Beam angle 120°

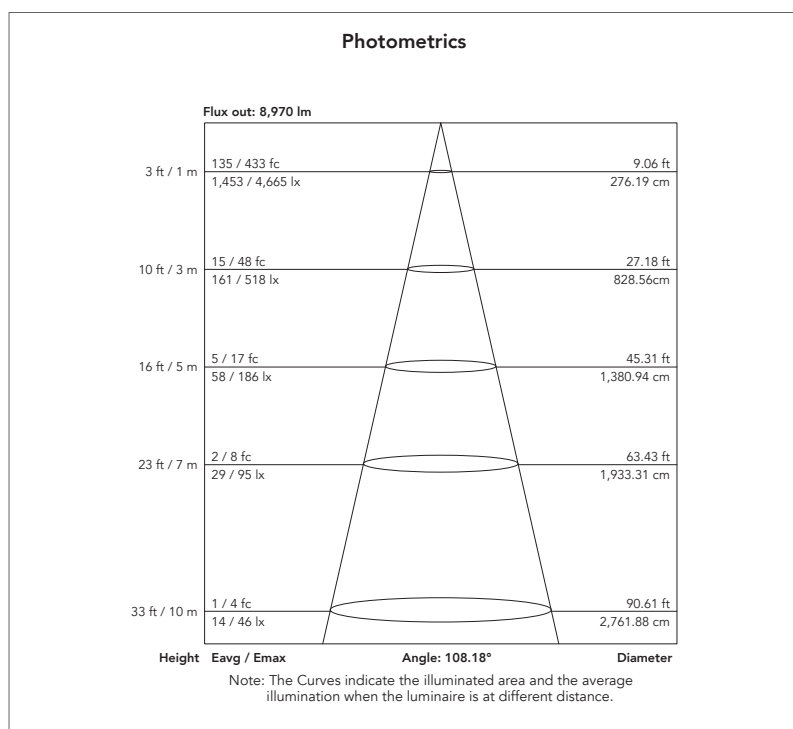

TECHICAL DRAWINGS



For more product
info and downloads
visit our website



PROLIGHTS is a trademark of
MUSIC & LIGHTS S.r.l.
musiclights.it

Via A. Olivetti snc
04026 - Minturno (LT) ITALY
Tel: +39 0771 72190

prolights.it
info@prolights.it