

Sunrise 2IP

IP rated modular LED blinder with 2x75W LED WW and Tungsten emulation
ORDER CODE: **SUNRISE2IP**



Sunrise 2IP is an IP rated and convection cooled modular 2x1 LED Blinder, designed to be a perfect touring solution to replace classic halogen fixtures of any sizes.

The fixture is designed with on-board, fast-locking mechanism in order to combine multiple units together and using them as brick, turning the **Sunrise 2IP** into a 4x1 or a 2x2 blinder easily. The **Sunrise 2IP** is equipped with 2x75 W COB Warm White LEDs pixel controlled and its optical system is capable to output the same performance and beam angle of the fluorescent bulbs, including dimmer ramp with red-shift.

MAIN FEATURES

- 2x75W Warm White LED with Amber backlight for tungsten simulation
- Modular fast-locking assembly to combine multiple units together
- IP rated and convection cooled

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 2 x 8W Amber + 2 x 75W Warm White LEDs
- CCT: 2.700 K
- Luminous flux: 10'088 lm @full
- Lux: 1'076 lx @3 m full
- Lux: 387 lx @5 m full
- CRI: > 93
- TLCI: > 91
- TM30 Rf: > 91
- TM30 Rg: > 97
- Source life expectancy: > 70.000 h

OPTICS

- Beam angle: 60°
- Field angle: 100°
- Lens type: parabolic reflector

DYNAMIC EFFECTS

- Static colour mode: selection of static dimmer
- Manual colour mode: manual adjustment of dimmer and strobe
- Auto mode: built-in programs with execution speed adjustment
- Special features: tungsten emulation activation

BODY

- Body: sturdy die-cast aluminium body
- Body colour: RAL 9004
- Other: on board mechanics for modular assembly of multiple fixtures

CONTROL

- Protocols: DMX512, RDM
- DMX channels: 1 / 2 / 6 / 12 channel
- Pixel control: pixel2pixel control
- RDM: RDM ready for remote monitoring and settings
- Display: Graphic User Interface
- Firmware upgrade: yes, via USB - DMX interface (UPBOX1) not included
- Master/Slave: for synchronised operation of more units linked in a chain
- Other: 16bit control of dimmer

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1 ~ 30 Hz, electronic
- Operating temperature: -10° ~ +45°
- LED Control: flicker free frequency with adjustable PWM
- Selectable PWM: 600 ~ 25.000 Hz

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 160W
- Output (at 230V): 16 units on a single power line
- Power factor: > 0,94

PHYSICAL


- Cooling: passive cooling and fan-free
- Suspension and fixing: bracket for truss rigging and hardware for connection of more units
- Signal connection: Seetronic XLR 5p IN/OUT connectors
- Power connection: Seetronic powerCON TRUE IP65 IN/OUT
- IP rating: 65 for temporary outdoor application, not for fixed installation
- IK rating: 08
- Dimensions (WxHxD): 432x230x102mm
- Weight: 7,6kg

ACCESSORIES & RELATED PRODUCTS



- | | | | |
|-----------------|--|------------|---|
| ▪ FCLSUNRISE2IP | Flight case with internal compartments for 4 pcs of SUNRISE2IP | ▪ SR2IPOS | Quick-lock omega bracket for SUNRISE2IP |
| ▪ SR2IPHB01V/2V | Hanging bracket for SUNRISE2IP, mounting for 1-2 vertical column of LEDs | ▪ C6002B | Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black |
| ▪ SR2IPHB02H | Hanging bracket for SUNRISE2IP, mounting for 2 horizontal columns of LEDs (included) | ▪ RSR1235A | Steel security cable for hanging bodies, inox steel shackle, L=120 cm, silver |
| ▪ SR2IPHB04H | Hanging bracket for SUNRISE2IP, mounting for 4 horizontal columns of LEDs | ▪ UPBOX1U | Firmware uploader kit, USB IN, 3pin XLR DMX OUT, USB OUT |

PRESET FULL ON

Beam angle 50%: 60,7°

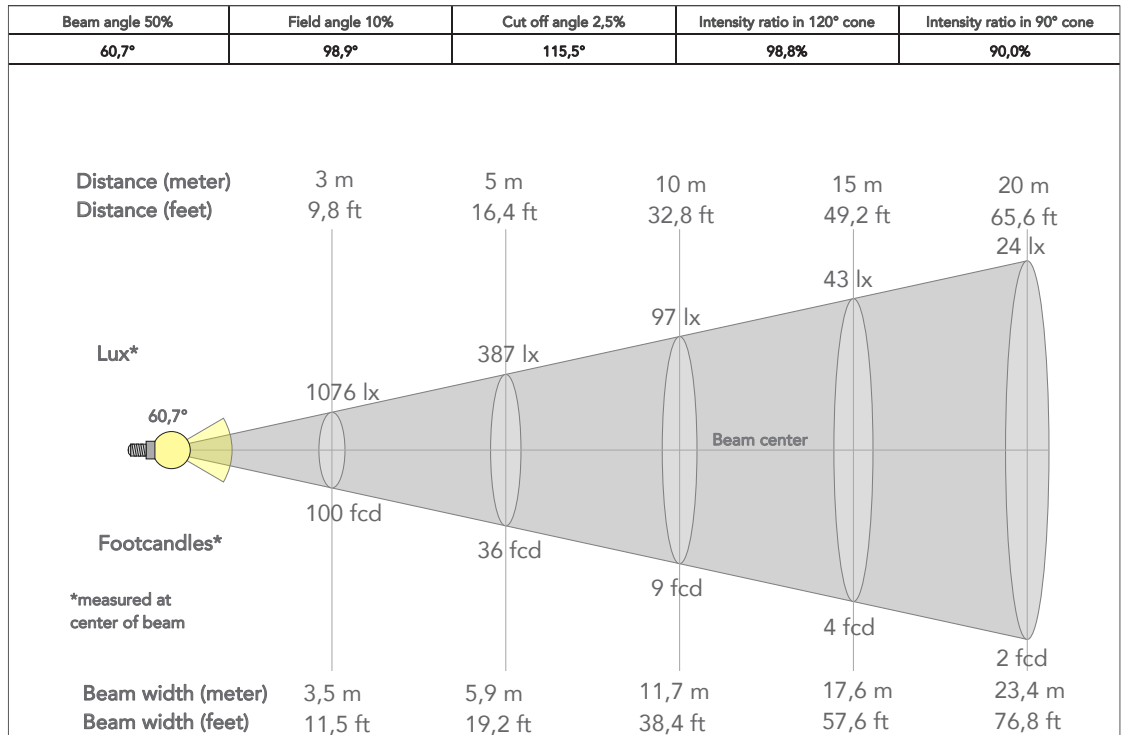

TECHICAL DRAWINGS

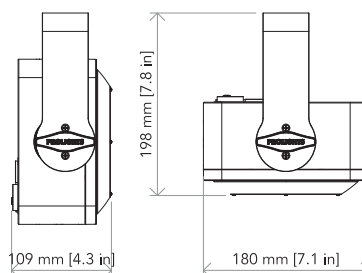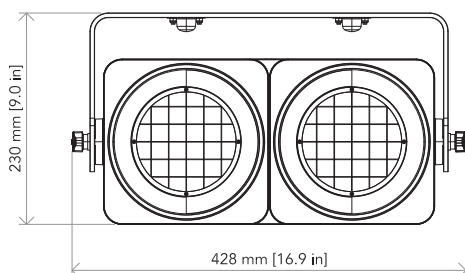

For more product info and downloads visit our website

