

EclFresnel JrPTW

LED Fresnel pole operated FC and Tunable White with colour correction, to replace 650W lamp
ORDER CODE: ECLFRJPTW



EclFresnel JrPTW is an advanced LED replacement of traditional 650 W Fresnel lamps, featuring 6 colour mixing delivering high precision reproduction of the white spectrum from 2.800 K to 10.000 K with high CRI and an extensive colour reproduction.

The optical system harnesses the power of a 130 W custom LED with 6 colours to create an even projection, beautiful colours and precise white, with added ability to apply +/- green and magenta correction to match other sources of light.

Featuring HD dimming and tuning from 2.800 K to 10.000 K version with external battery capabilities, the **EclFresnel JrPTW** delivers the performance and quality of output demanded from this level of luminaire.

MAIN FEATURES

- Tunable white 2.800 K - 10.000 K with high CRI and extensive colour mixing
- +/- green and magenta white tuning
- Silent operation for studio and stage use
- Battery ready, compatible with industry standard external batteries (optional)

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 130W 6 colour custom LEDs source (red, orange, cyan, royal blue, green, lime)
- CCT: 2.800 K - 10.000K
- Luminous flux: (15,5°) 1'610 lm - (55°) 2'952lm @full
- Lux: (15,5°) 709 lx - (55°) 145lx @5 m full
- CRI: 91 @ 3200K; 92 @ 5600K
- R9: 91 @ 3200K; 92 @ 5600K
- TLCI: 86 @ 5600K
- TM30 Rf: 88 @ 3200K; 86 @ 5600K
- TM30 Rg: 106 @ 3200K; 104 @ 5600K
- Source life expectancy: > 50.000 h

OPTICS

- Zoom: 15,5° - 55° half peak angle
- Lens diameter: 6" - 150mm
- Lens type: fresnel zoom lens

COLOUR SYSTEM

- Colour mixing: tunable white + colour
- CTC: CTC control through dedicated DMX channel, + / - green and magenta correction and amber shift activation by DMX
- White presets: 2.800 K - 10.000K
- Colour wheel: virtual colour wheel with presets
- Macros: several pre-build macros with adjustable speed

DYNAMIC EFFECTS

- Static colour mode: selection of static colour
- Manual colour mode: manual adjustment of intensity, CT, colour correction from knob
- Auto mode: built-in programs with execution speed adjustment
- Special features: linear crossfade from a white to any color and CTO applied on colours

BODY

- Hardware on-board: filter frame, 8 doors barn door, spigot
- Pan angle: 360° with manual regulation
- Tilt angle: 340° with manual regulation
- Body: sturdy die-cast aluminium body conceived for long-time durability
- Body colour: black

ACCESSORIES & RELATED PRODUCTS

- ECLFRSJBD Black barn door 8 directional flaps to adjust the light beam
- ECLFRSJBP4 Battery pack kit for EclFresnelJ serie
- ECLFRSPG Spigot for PROLIGHTS Fresnel serie
- UPBOX1U Firmware uploader kit, USB IN, 3-pin XLR DMX OUT, USB OUT

- Other: Spigot 28 mm

CONTROL

- Protocols: DMX512, RDM, local knob
- DMX channels: 1 / 2 / 5 - 1 / 5 - 2 / 7 / 9 / 12 / 13 / 16 / 19 / 21channel
- RDM: RDM ready for fixture remote monitor and settings
- Display: black OLED high resolution display
- Firmware upgrade: yes, via USB - DMX interface (UPBOX1) not included
- Other: 16bit control of dimmer and colour

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 4 different dimming curves available
- Strobe / shutter: 1 - 30 Hz, electronic
- Flicker: flicker free frequency with adjustable PWM
- Selectable PWM: 600 ~ 25.000 Hz

ELECTRICAL

- Mains power supply: 100-240 V – 50/60 Hz
- Max power consumption: 100W
- Output (at 230 V): 23 units on a single power line
- Power factor: >0,95

BATTERY


- Battery: 29,6V 4400 mAh external battery (optional ECLFRSJBP4)
- Re-charge connection: connection for external battery through XLR 4p
- Other: Voltage range: 22,4V-33,6V

PHYSICAL

- Cooling: combination of heat pipe cooling system and low noise fan
- Suspension and fixing: hanging bracket suitable for safe hanging and positioning
- Signal connection: Amphenol XLR 5p IN/OUT connectors
- Power connection: Neutrik powerCON TRUE1 IN/OUT connectors
- IP rating: 20
- Dimensions (WxHxD): 298x496x260mm
- Weight: 7,5kg


COLOUR PRESET FULL ON

Beam angle 29°

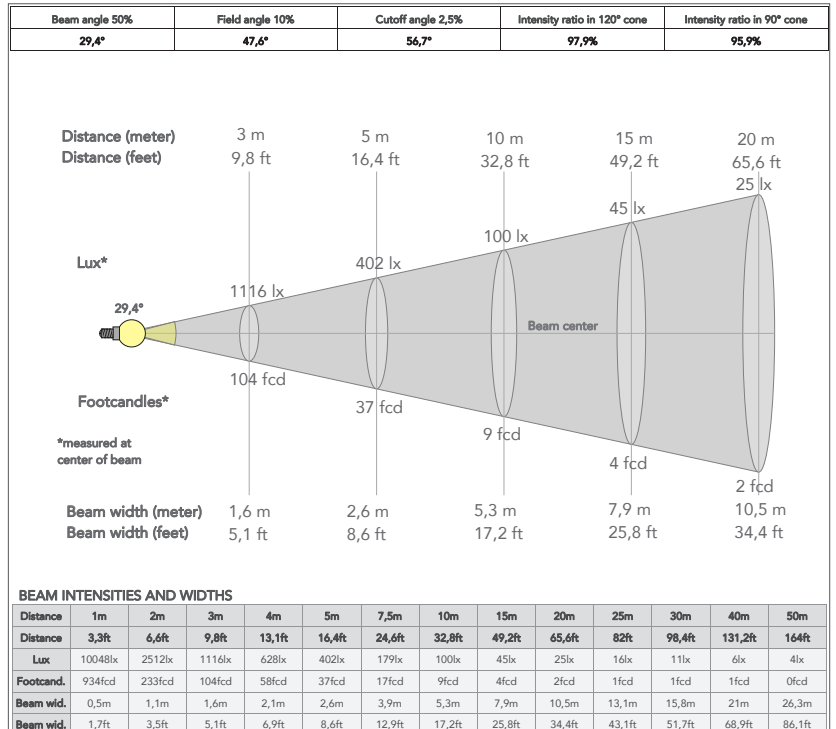


COLOUR PRESET FULL ON

Beam angle 55°

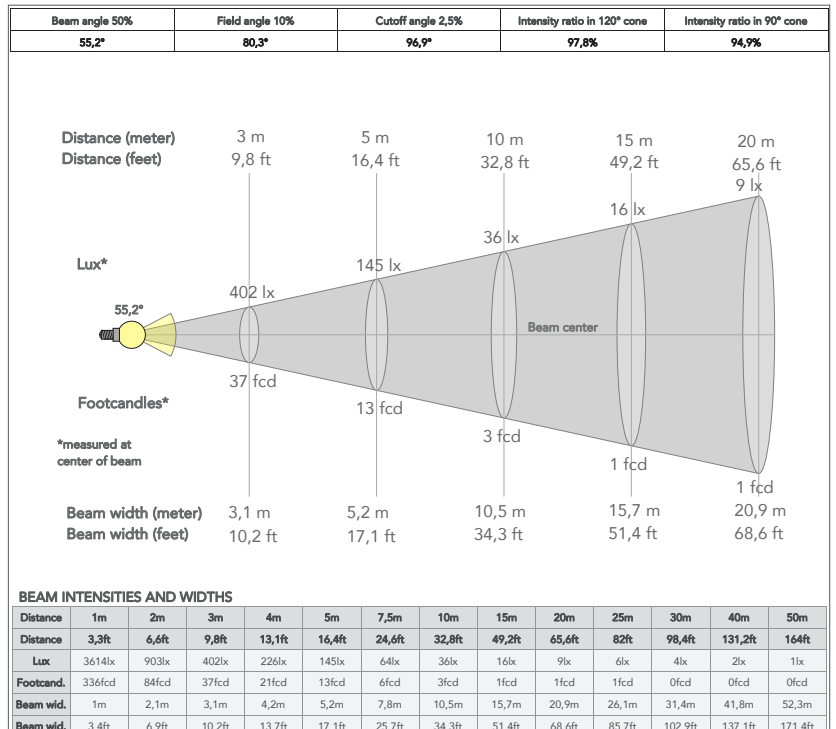

TECHICAL DRAWINGS

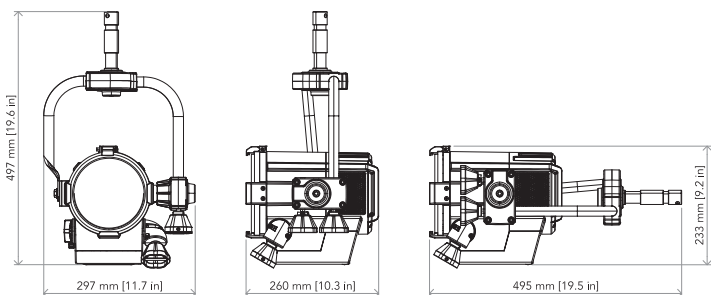

For more product info and downloads visit our website

